


Materials:

- 1-rack
- 2-1 ¼" spacers
- 4-washers
- 4-lock washers

1. Take out 4 original rear rack bolts:



2. Position bike rack over 4 holes in cycle using proper slots in rack:

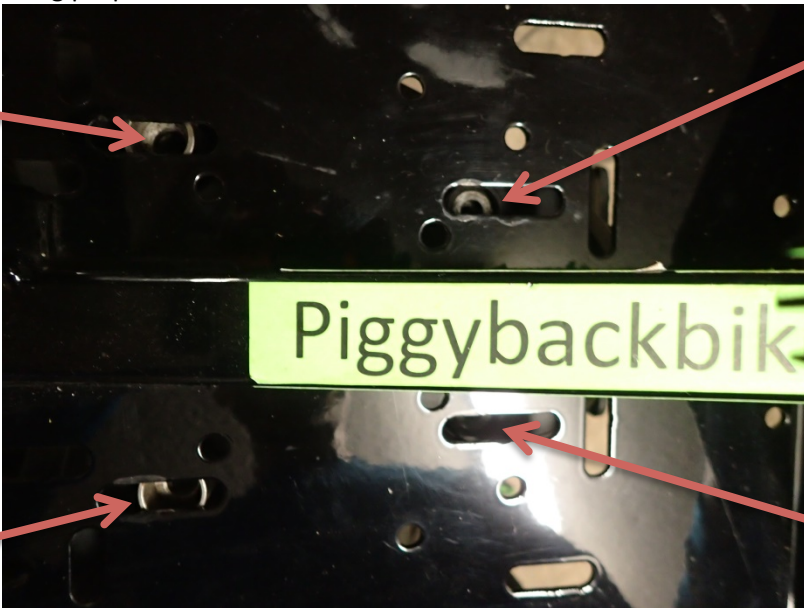

3. Put 1 ¼" spacers under back two slots:



4. From the top of the rack, insert the 2 ¼" bolts through the 4 holes. Ensure the 2 spacers are lined up with the 2 back holes/slots. The lock washers go on bolts first, followed by washers, both on top of bike rack. Important, the lock washers should be immediately under the head of the 4 bolts:



5. Tighten the 4 bolts securely.